


# ES70 Lift & Slide Window System



A high-end thermo-insulating system, suitable for door height windows with exceptional requirements for functionality and aesthetics.

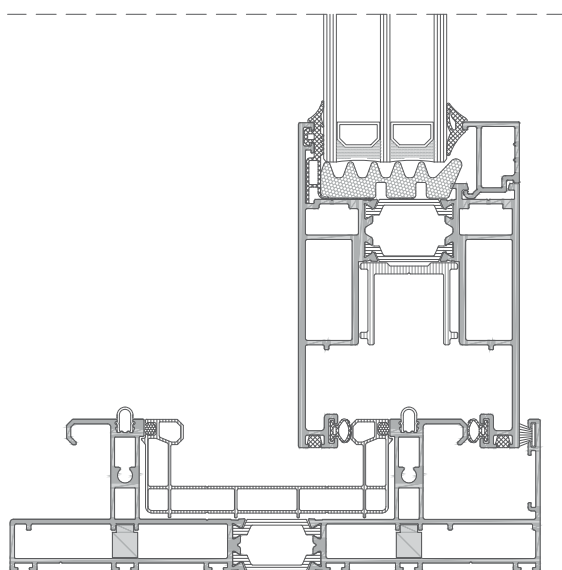

## Technical features

- Elegant straight design
- Flat bottom frame option with only 25 mm height
- Narrow interlock option
- Double & triple glazing option
- Glazing infill range: 25 ÷ 52 mm

## Hardware accessories


- Lift & Slide mechanism
- On demand: Max. sash width / height up to 3300 mm / 3300 mm
- Max. sash weight: 300 kg
- On demand: up to 440 kg

## Performance

Air Permeability:	<b>Class 4</b>
Watertightness:	<b>E750</b>
Resistance to Wind Load:	<b>C5</b>
Thermal transmittance ( $U_p$ ):	from <b>2,73 W/(m<sup>2</sup>K)</b>

## Typologies

- Single, double, triple & multiple track Lift & Slide
- Combination with fixed light (Hotel type)
- Flat rails solution with only 25mm height
- Integration of fly screens

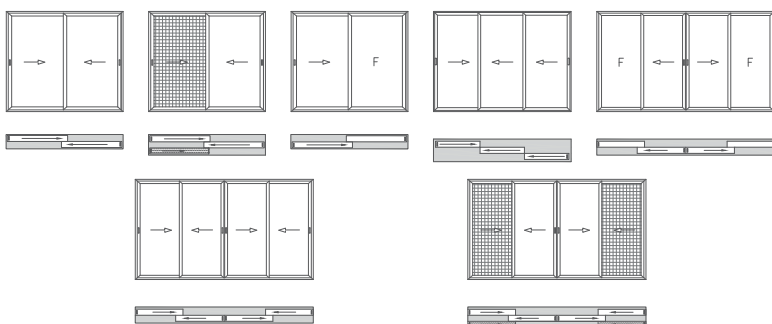

## Surface treatment options

- RAL colours
- ETEM colours
- Anodizing
- Wood effects
- Quality Standards:
  - QUALICOAT
  - QUALANOD
  - QUALIDECO

## Production certificates

- EN ISO 9001
- EN ISO 14001
- OHSAS 18001

